

06




	Aluminium	
	2100 mm	9502ES ÷ 9509ES
	2700 mm	9520ES ÷ 9525ES
	Stainless Steel	
	12÷100 kg	

***Option F**

The balancer is equipped with a friction/brake which controls the rotation speed of the drum.


*This option is feasible when placing a new order while it is not possible to assemble this device on balancers already installed.

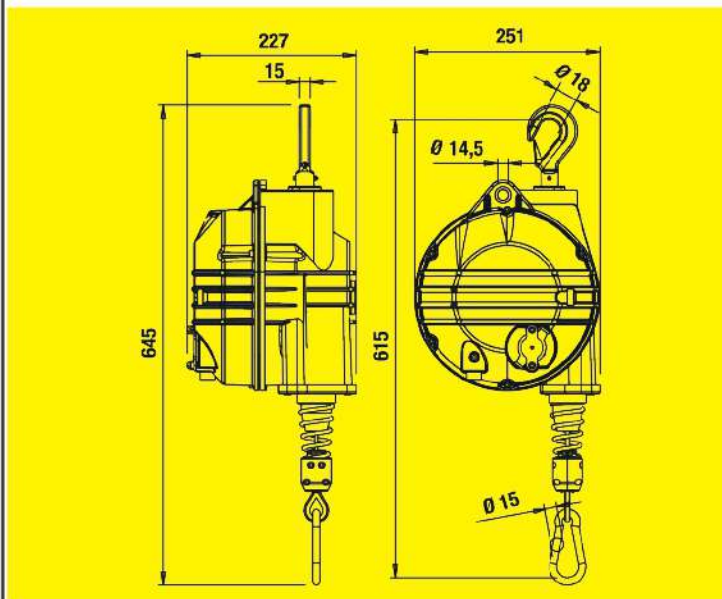

*Option F



Option BC



Option RC



Option RC (7270000004)
Conductive rotating hook group.

Option BC (7190000004)
Locking-unlocking device.

Item	9502ES	9503ES	9504ES	9505ES	9506ES	9507ES	9508ES	9509ES	9520ES	9521ES	9522ES	9523ES	9524ES	9525ES
**	20÷30	30÷40	40÷50	50÷60	60÷70	70÷80	80÷90	90÷100	12÷20	20÷30	30÷40	40÷50	50÷60	60÷70
	12,60	15,20	15,50	16,70	15,50	17,70	16,20	16,80	12,80	12,60	15,80	15,40	16,60	15,70